



## ELECTRIC ACTUATOR OPTIONS & ACCESSORIES

The basic options and accessories listed in this section represent many of the most commonly used for electric actuation, factory configured to order on the actuation package. Contact Spears® for any desired accessories, options, functions, or special controls not listed.

### Overview of Basic Options & Accessories

Options & Accessories	Electro Series Ball Valves	Premium Electric TU Ball Valves	Premium Electric Butterfly Valves	Premium Electric Diaphragm Valves
24 VAC	✓	✓	✓	✓
230 VAC	✓	✓	✓	✓
230 VAC 3-phase, 60Hz	--	✓	✓	✓
230 VAC 3-phase, 50 Hz	--	✓	✓	✓
12 VDC	✓	✓	✓	✓
24 VDC	✓	✓	✓	✓
NEMA 4X, 7, 9 Rating	(4X Standard)	✓	✓	✓
Declutchable Manual Override	--	✓	✓	✓
Duty Cycle Upgrade	✓	✓	✓	✓
Spring Return (Fail Safe)	--	✓	✓	--
Positioner Board (modulating)	--	✓	✓	✓
Transmitter	--	✓	✓	✓
"2-Wire" Control Relay	✓	✓	✓	--
Position Indicator (Visual)	✓	✓	✓	--
LED Indicator Lights	--	✓	✓	✓
Heater & Thermostat	--	✓	✓	✓
Limit Switch Sets	--	✓	✓	✓
Torque Sensor	--	✓	✓	✓
Speed Controller	--	✓	✓	✓
Friction Brake	--	✓	✓	--
ID Tag - SS	✓	✓	✓	✓

*Contact Spears® for any desired accessories, options, functions, or special controls not listed in this guide.*



## Standard (2-position) Actuator Voltage Options

Voltage options are listed for each type with 2-position (open/close) actuation. See Modulating Service Option for variable position actuators and applicable voltages.

### Electro Series Ball Valves (All 1/2" - 2")

Voltage Options
12 VAC
24 VAC
230 VAC
12 VDC
24 VDC
115 VAC

### True Union 2000 Ball Valves

Voltage Options
24 VAC
230 VAC
12 VDC
24 VDC

### Diaphragm Valves

Voltage Options
24 VAC
230 VAC
12 VDC
24 VDC

### Butterfly Valves

Voltage Options
24 VAC
230 VAC
12 VDC
24 VDC

## Enclosure NEMA Rating Options

Standard enclosures are a minimum of NEMA 4. The following NEMA ratings are available for all True Union Ball Valves, Butterfly Valves and Diaphragm Valves (see NEMA Ratings in Terminology & Definitions for additional description detail).

Enclosure Rating	General Description
NEMA 4	Watertight & Dust Tight
NEMA 4X	Watertight & Dust Tight with corrosion resistance
NEMA 7	Explosion Proof (class I, division 1, groups A, B, C, D)
NEMA 9	Explosion Proof (class II, division 1, groups E, F, G)

## Declutchable Manual Override Option

Available for all Premium Electric actuated valves.

Valve Type
True Union 2000 Ball Valve
Butterfly Valve
Diaphragm Valve

Slightly different than straight manual override, *Declutchable* Manual Override disengages the actuator gear train for manual operation of the valve. Valves with this option have a hand wheel mounted on top of the actuator for manual valve operation.

## Duty Cycle Upgrade Option

Upgrades in duty cycles use heavier motors to handle heat build up from extended operation. Contact Spears® for specific Duty Cycle information.

## Spring Return (Fail Safe) Option

An internal spring in the actuator is configured to either open or close upon loss of power supply. Special gear clutch uncouples motor during spring return. Operation can be specified as either fail-open when spring return open is desired or fail-close when spring return close is desired.



# ELECTRIC ACTUATOR OPTIONS & ACCESSORIES



### “2-Wire” Control Relay

Special control switch setup operates the valve through internally mounted control relay. Valve opens when control switch is open and closes when control switch is closed. Uses 4-wire connection with 2 wires to line voltage and 2 wires to SPST control switch. Available either in normally closed or normally open configuration.



### LED Position Indicator Lights

LED (light emitting diode) red/green indicator lights mounted on actuator enclosure to designate open/closed position.



### Positioner Board (Modulating)

Modulation is used to control or throttle flow in response to an external control signal. An internally mounted, solid state positioner board accurately controls valve position from open to close. Available in the actuator voltages and input signals shown Note: Modulating Service option includes Duty Cycle Upgrade to a minimum of 75%.



### Heater and Thermostat


Mounted internally, heats the inside of the enclosure in low temperature environments to prevent condensation and keep internal lubricants fluid. The thermostat activates the heater when the enclosure internal temperature drops below the set point. There are a variety of thermostats available and a set point must be specified at the time of ordering.

Modulating Actuator Voltage	Input Signal
115 VAC	4-20mA, 0 - 5 VDC, 0 - 10 VDC
230 VAC	4-20mA, 0 - 5 VDC, 0 - 10 VDC
24 VAC	4-20mA, 0 - 5 VDC, 0 - 10 VDC
24 VDC	4-20mA, 0 - 5 VDC, 0 - 10 VDC



### Auxiliary Limit Switches (Provided in sets of 2)


Additional internally mounted single pole double throw limit switch (SPDT) independent from the motor switches. Typically used for indicator lights, auxiliary equipment, etc. Actuation packages accept from 1 to 2 additional sets of auxiliary limit switches as indicated. When ordering replacement sets, specify hole size of cams (either 3/8" or 1/2").



### Speed Controller

Internally mounted relays (not shown) and solid state timer allow variable control of valve cycle time (speed) by selecting combinations of ON time and OFF time options. Rate may be slowed, but cannot exceed the standard cycle time specified for the actuator.

Valve Type	Auxiliary Limit Switch Sets
<b>True Union Ball Valve</b>	
1/2" - 2"	1
2-1/2" - 3"	1
4" - 6"	2
<b>Butterfly Valve</b>	
1-1/2"	1
2" - 10"	2
12"	2
<b>Diaphragm Valve - all Sizes</b>	

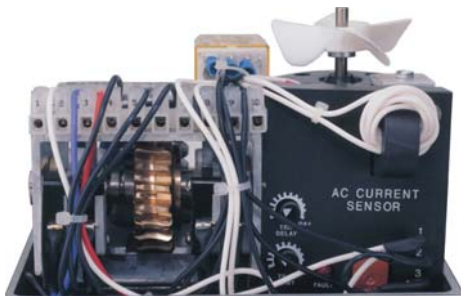

### Torque Sensor

Internally mounted sensor is adjustable to specific torque limits to avoid damage to valve in the event of blockage.



## ELECTRIC ACTUATOR OPTIONS & ACCESSORIES



### Transmitter

The Transmitter module is normally used with the 4-20mA Positioner Board and the board's power supply. It can also be used as a stand alone feedback transmitter when no position controller is used, but will require an external power supply for stand alone application. This internally mounted module provides a 4-20mA output signal directly proportional to the Positioner Board feedback potentiometer. This signal can be used by a remote instrument to monitor or display actuator position. Zero and span adjustments allow adjustment of the Transmitter's 4-20mA signal to correspond with the zero and span positions set by the Positioner Board.



### Custom ID Tag

Stainless steel valve/actuator ID Tag imprinted to user specified identification criteria. Each tag is 1/2" x 3" and accommodates up to 3 lines of text, maximum of 12 characters and spaces per line.



### Friction Brake

Internally mounted device which is used to eliminate mechanical "coast" of the actuator motor at the end of its cycle. Brakes are standard on all electrically actuated Butterfly Valves and not applicable to Diaphragm Valves.